


Highlights:

- 11 AWG thin and dense stranded conductors
- Flexible PVC jacket
- 4 conductors for 2-channel loudspeaker connection

Product information:

The LS 4-core series cables are high quality and flexible multi-core loudspeaker cables. This kind of double isolated speaker cable is suitable for use in indoor and outdoor applications. Each conductor is fitted with a highly flexible jacket made of PVC. The four conductors are twisted with two cotton cords, which ensures the great strength and flexibility of the cable. The four wires, together with the cords, are packed with a paper foil and a general PVC jacket.

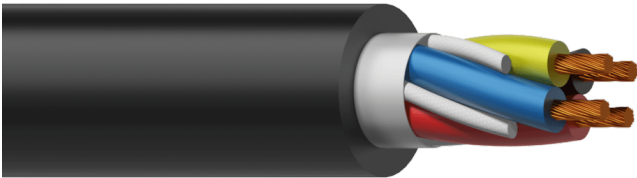

Inner Conductors:



Product Features:

Application	AV & IT
	Rental & MI
Series	Bulk & Accessories

Physical Characteristics:

Type of cable		4-core loudspeaker cable	
Inner conductor	Material	BC 350 x 0.12 mm (Ø) (OFC)	
	Section	0.0062 "²	
	Insulation	Material	PVC 4 mm (Ø)
		Colours	Black / Red / Blue / Yellow
Number of conductors		4	
Filling		Cotton Yarn	
Separator		Cotton paper	
Inner conductor	American Wire Gauge		11 AWG
Outer jacket	Material		Flexible PVC 14 mm (Ø)
	Colours		Black
Inner conductor	Conductor twisting		Yes


Mechanical Characteristics:

Temperature range	Fixed installation	- 104 °F till + 176 °F
	Mobile installation	- 77 °F till + 158 °F
Bending radius	Fixed installation	8 x outer diameter
	Mobile installation	10 x outer diameter

Electrical Characteristics:

Lead resistance	0.41 Ω / 100 m
Cable Crosstalk	Min. 64 dB / 100 m

Cross sections:



Variants:

- LS440/1 - 100 meter